


Alarm Troubleshooting

WARNING



Follow **Pressure Relief Procedure**, page 38, when you stop spraying, before changing spray tips, and before cleaning, checking, or servicing equipment. Read warnings, page 6.


CAUTION

Do not use the fluid in the line that was dispensed off ratio as it may not cure properly.

ProMix™ II Alarms

The ProMix™ II alarms alert you of a problem and help prevent off-ratio spraying. If an alarm occurs, operation stops and the following occurs:

- A red LED illuminates steadily or flashes on the Operator Station.
- Operator Station displays an alarm E-Code (E1-E9).
- Alarm sounds.
- Status bar on the EasyKey™ Display shows the E-Code with a description.

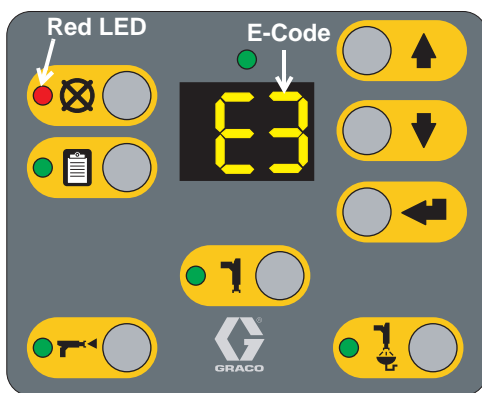

Operator Station


Alarms E-Codes

Description	E-Code
Communication Error	E1
Purge Error	E2
Potlife Exceeded Alarm	E3
Ratio Alarm	E4
Overdose Alarm	E5
Dose Time A Alarm	E6
Dose Time B Alarm	E7
Autodump Complete Alarm	E8
EasyKey in Setup Mode	E9

To Clear Alarm and Restart



When an alarm occurs be sure to determine the E-Code before clearing it. If you forget which E-Code occurred, you can use the EasyKey™ Report screen (page 34) to view the last 10 alarms, with date and time stamps.

Except for Potlife Exceeded (E3) Alarm and Purge Error (E2) Alarm, page 52, all alarms can be cleared by pressing the Error Clear  key on the Operator Station.